



# PRECISION INSTRUMENT COMPANY

## 2 1/2" LIQUID FILLED GAUGE MODEL: SEG-201L

Our 'SEG-200L' Series Gauge Line Is A Quality Line Of Liquid Filled Gauges. The Glycerine Filling Helps Dampen The Effects Of Pulsation And Vibration, While Also Perpetually Lubricating The Movement (And Keeping Contaminates Such As Dirt Away From All Moving Parts) Which Will Extend The Life Of The Gauge.


This Gauge Has Been Specifically Designed With The Original Equipment Manufacturers In Mind And Are Typically Used On Hydraulic & Pneumatic Systems As Well As Any Commercial Or Industrial Application Not Corrosive To Brass And Bronze Wetted Parts Where Glycerine Filling Is Suitable For Use.

### SPECIFICATIONS:

- Dial Sizes: 2 1/2"
- Connection Sizes: 1/4" NPT
- Stainless Steel Case And Bezel
- Brass Internals & Connection
- Phosphour Bronze Bourdon Tube
- Plastic Lens
- Liquid Filled
- Accuracy : 2 - 1.5 - 2 %
- Dual Scale: PSI & Bar (x100=kPa)
- Ambient temperature: 30°F to 160°F



RANGE	CODE	Major In	Minor In
30/0"VAC	A	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/150	CF	30	2
30/0/300	CH	50	5
0/15	B	2	0.2
0/30	C	5	0.5
0/60	D	10	1
0/100	E	10	2
0/160	F	20	2
0/200	G	20	5
0/300	H	50	5
0/400	I	100	10
0/500	J	100	10
0/600	K	100	10
0/1000	M	200	20
0/1500	N	300	20
0/2000	O	500	50
0/3000	P	500	50
0/4000	Q	1000	100
0/5000	R	1000	100
0/6000	S	1000	100
0/10,000	U	2000	200

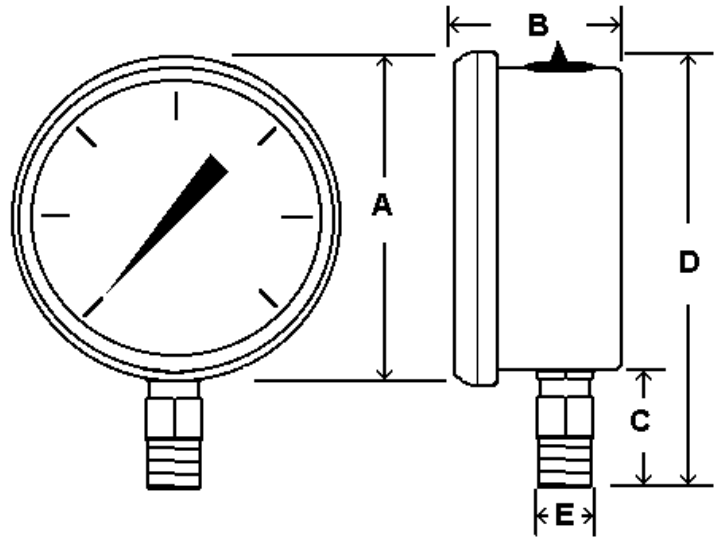

		A	B	C	D	E
2 1/2" Dial	In	2.67	1.19	1.02	3.55	1/4" NPT
	MM	68	30.2	26	90	
*Dimensions subject to change						