


2 1/2" DIAL TRIDICATORS

These instruments have been designed to indicate temperature and pressure in a single unit. With a price that makes this an affordable option for applications where bronze internals are suitable for use, the use of a single 'Tridicator' saves time during installation, amount of piping required and of course saves money versus using separate gauges and thermometers. The primary applications for these are hot water boilers and water heaters.

General Specifications

- 2 1/2" Dial, 1/4" NPT Center Back Connection
- Available With 1/2" NPT Adapter
- Black Steel Case and Bezel
- Dual Reading Pressure & Temperature
- Temperature: 70-320°f & 20-160°c
- Pressure: PSI & Feet of Water
- Plastic Lens with Red Indicator
- 3-2-3 % Accuracy

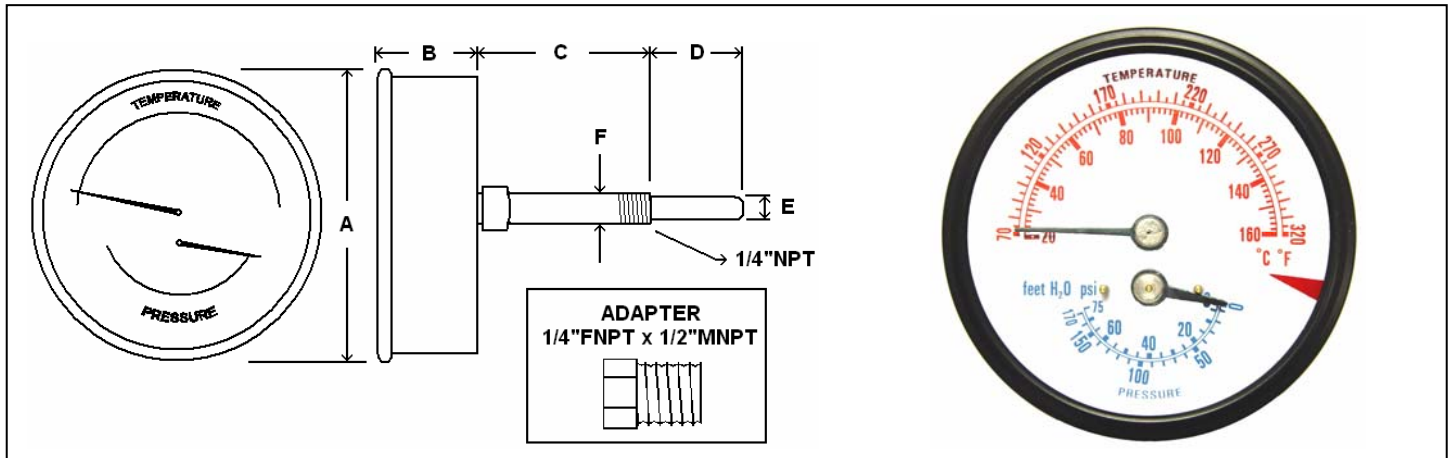

Dimensions	A	B	C	D	E	F
Inches	2.64	1.02	Per Customers Requirements	Per Customers Requirements	.34	.53
Millimeters	67	26	Per Customers Requirements	Per Customers Requirements	9	13.5

PART NUMBER	PRESSURE		TEMPERATURE	
	PSI	Feet of Water	'F	'C
TRI-RC-254Rx.xx-D	0/75 PSI	0-170'	70-320° F	20-160° C
TRI-RC-254Rx.xx-E	0/100 PSI	0-231'	70-320° F	20-160° C
TRI-RC-254Rx.xx-G	0/200 PSI	0-460'	70-320° F	20-160° C
TRI-RC-254Rx.xx-H	0/300 PSI	0-690'	70-320° F	20-160° C