


# 3 1/4" DIAL TRIDICATORS

These instruments have been designed to indicate temperature and pressure in a single unit. With a price that makes this an affordable option for applications where bronze internals are suitable for use, the use of a single 'Tridicator' saves time during installation, amount of piping required and of course saves money versus using separate gauges and thermometers. The primary applications for these are hot water boilers and water heaters.

## General Specifications

- 3 1/4" Dial, 1/4" Npt Center Back Connection
- Available With 1/2" Npt Adapter
- Black Steel Case and Bezel
- Dual Reading Pressure & Temperature
- Temperature: 70-320°F & 20-160°C
- Pressure: 0-100 PSI & 0-700 kPa
- Plastic Lens
- 3-2-3 % Accuracy

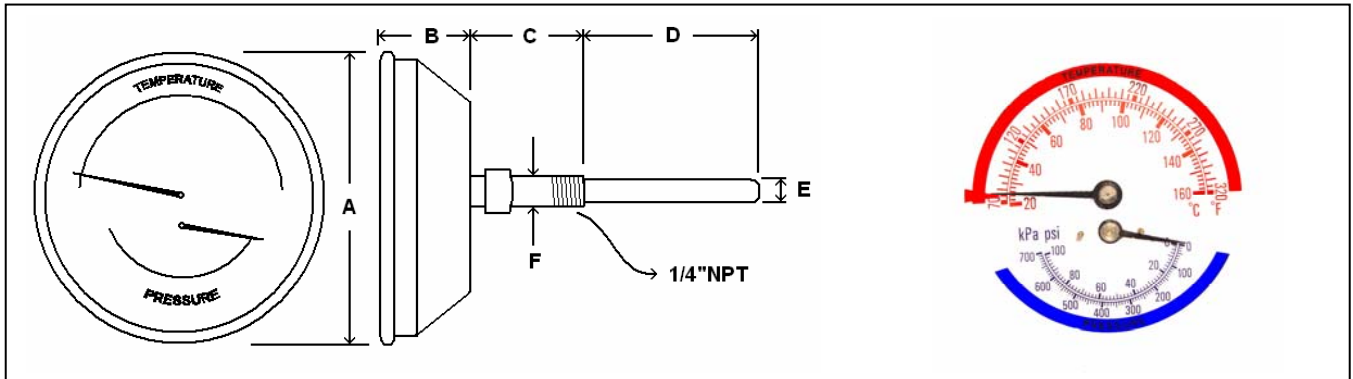

Dimensions	A	B	C	D	E	F
Inches	3.20"	1.20"	1.96"	1.50"	.37"	.54"
Millimeters	84mm	30.7mm	50.7mm	38mm	9.5mm	13.7mm

PART NUMBER	PRESSURE		TEMPERATURE	
	PSI	kPa	°F	°C
TRI-RC-3.25Rx.xx-D	0/60 PSI	0-400 kPa	70-320°F	20-160°C
TRI-RC-3.25Rx.xx-E	0/100 PSI	0-700 kPa	70-320°F	20-160°C
TRI-RC-3.25Rx.xx-G	0/200 PSI	0-1400 kPa	70-320°F	20-160°C
TRI-RC-3.25Rx.xx-H	0/300 PSI	0-2100 kPa	70-320°F	20-160°C